Integrated Induction Cooktop and Air Extraction System

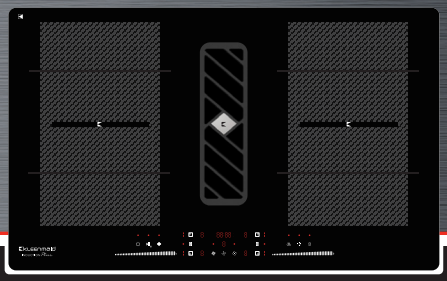

Model: ICTFX9042

The Cooktop:

- Induction cooktop with quartz grey graphics
- Bevelled edges 15mm x 5mm
- Eight induction elements with 6 cooking zones
- High power 7.4kW
- Slider touch control 9 levels and seven timers
- Auto-Bridge function allows for BBQ griddle plate cooking. Order optional CIG4523 griddle plate
- Pause resume function
- Auto-Stop in case of accidental start, long absence, overflow over temperature
- Power adapts automatically to the pot size
- Residual heat indicators with Voltage Power Guard
- **SLTT. S**ustained **L**ow **T**emperature **T**echnology for delicate cooking

Auto-Bridging

Voltage Power Guard

Arsenic Free Glass

Residual Heat Indicator

For Delicate Cooking

Pause/ Resume

Spill Protection

6 Zone Induction

Griddle Plate CIG4523 Optional

Child Safety Lock

UltraFlow Ducting

Total Input Power

Glass Surface Mounted

Whisper

The Extractor:

- High performance 900 m^3/h
- 54 dbA low noise due to **UltraFlow** ducting
- Compact engineering allows for installation within a standard 600mm bench
- Ideal for island bench installation (Optional recirculating kit)
- The **UltraFlow** ducting system is three times more effective than traditional flexible ducting.
- Touch control via the cooktop surface
- 9 auto set extraction speeds
- Five-layer dishwasher safe aluminium grease filter in easy-to-remove cassette
- Ducted-out mode standard, recirculating mode requires optional kit ICTFXRK which includes carbon filter.

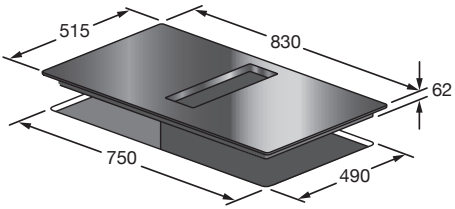

*The base filter box below the cooktop is 194mm deep.

These dimensions are provided as a general guide only and should not be used for designing or constructing cabinetry or for installation.

To obtain full installation instructions for this appliance go to kleenmaid.com.au and click on User Care Manuals, top right.

Fineline: TBA J14356_02

Level 2, 204 Botany Road, Alexandria NSW, 2015
P: 02 9310 1207 • E: support@kleenmaid.com.au
www.kleenmaid.com.au

kleenmaid
The best you can own